

AIRDECK ORIGINAL ASSEMBLY INSTRUCTIONS

AirDeck provides a fast, flexible, and effective collective fall arrest solution. It can be quickly inflated, for safety, during situations where there is a risk of harm from falling from height.



STORAGE

When deflated, fold for easy storage. Store in a dry location out of direct sunlight.

INSPECTION

Check for any tears or leaks. Ensure that the liner is inflated to 15mbar, and stays inflated at each deployment.

MAINTENANCE


Replace inner liner on impact or after 5 years. Clean with a water-based solvent-free solution.

PREPARATION: Before inflating the AirDeck ensure the inflater is fully charged and ready for use, the area is free from debris, and the bag is facing upward.

INFLATION: Open the access flap and remove the screw cap. Insert the InflatorDeck nozzle and inflate until the system pressure is met or air escapes the nozzle. Once full screw the cap on tightly and reseal the Velcro flap.

DEPLOYMENT: Ensure all bags are safely clipped. AirDeck original must be used in constraint. For AirDeck Safety Cover and Safety Layer see separate instructions. Product is suitable for use 2.5m and below from the surface of the product.

DEFLATION: Remove the screw cap. Push back the flap using the red tab until it locks in position. AirDeck will deflate rapidly if the valve is left open.

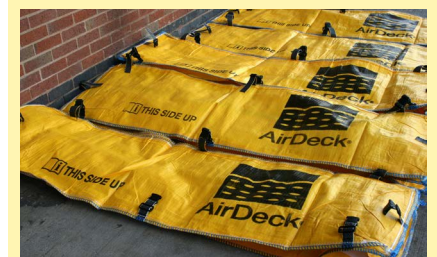

AIRDECKSAFETY.COM

ENQUIRIES@AIRDECKSAFETY.COM

+44 1509 502 155

AIRDECK 